

Renderoc® Plug

Rapid setting cement based, water leak plugging mortar

Uses

For the rapid temporary patching and plugging of concrete segments, concrete and brick tunnel linings, sewage systems, below ground access chambers, pipes, basements, foundations and mines.

Advantages

- Emergency water - stopping capability
- Single component - only the addition of clean water is required.
- Excellent bond to the substrate
- Low exotherm minimises thermal cracking
- Pre-packed formulation to overcome variation in site batching
- Contains no chloride admixtures.

Description

Renderoc Plug is supplied as a ready to use blend of dry powders which requires only the addition of clean water at site to produce a highly consistent, rapid setting mortar which is easy to apply in many difficult conditions. The material is based on a blend of cements, graded aggregates, special fillers and chemical additives which control the rate of set and minimise the risk of thermal cracking.

Technical support

Fosroc offers a comprehensive range of high performance, high quality concrete repair and construction products. In addition, Fosroc offers technical support service to specifiers, end users and contractors, as well as on-site technical assistance in locations all over the country.

Design criteria

Renderoc Plug can be applied to horizontal, vertical or overhead surface at a wide range of thickness. Generally, the volume of mixed material used in a single application is restricted to that which can be applied by trowel or gloved hand. Thicker sections can be built up in layers. If any doubt arises about the nature of the substrate, consult the local Fosroc office for further information.


Properties

Initial set time Approx. 1 - 2 mins. at 30°C

Note : Set times will be extended when mixed or applied at lower temperatures.

Compressive strength : 25N/mm² @ 28 days @ 30°C

Heat generation characteristics : High heat output (exotherm) leads to undesirably high shrinkage and consequent thermal cracking. The curves below show the low heat output of Renderoc Plug which minimises the risk of shrinkage and thermal cracking.

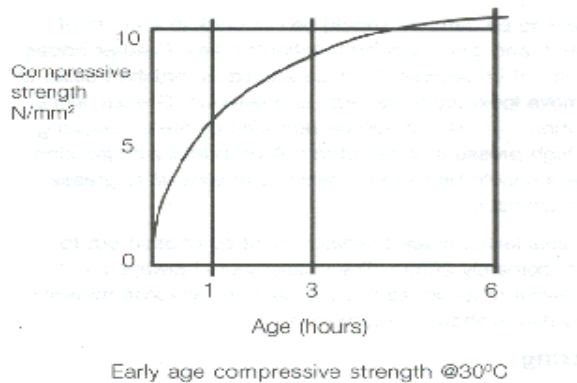

Specification clauses

Water stopping mortar

The water stopping mortar shall be Renderoc Plug, a single component cement based product to which only the site - addition of clean water shall be permitted. It must be chloride free and shall have a low exotherm to minimise thermal cracking.

Application instructions

Preparation

Areas to be patched should be cut back to a depth of 15mm and given a good mechanical key. Feather edges must not be allowed. Surface should be brushed clean to remove loose material, dust and laitence. Grease, slime or mould growth should be removed by steam cleaning or high pressure water jetting. A proprietary degreasing agent should be used for removal of light oil or grease contamination.

To seal leaks, crack openings must be chased out to approximately 20mm. The chase should always be undercut to avoid leaving a V-section. All loose material and debris should be removed.

Mixing

Renderoc Plug should be added to clean water in the following proportions :

One part clean water : 3 parts Renderoc Plug (measured by volume).

Renderoc® Plug

Mix to a stiff consistency in a suitable container using a trowel or gloved hand. Due to the rapid set characteristics of the product, only prepare a quantity of mortar which can be placed within the prescribed set time.

Application

Trowel apply or hand-knead the mixed mortar in place, ensuring maximum contact with the substrate before the material sets. If being used to plug running water, Renderoc Plug should be used and held in place until the initial set is reached.

Cleaning

Renderoc Plug should be removed from tools, equipment and mixers with clean water prior to the initial set. Cured material can only be removed mechanically.

Limitations

Renderoc Plug should not be used when the temperature is below 10°C and falling.

Storage

Shelf life

Renderoc plug has a shelf life of 6 months if kept in a dry store in the original, unopened bags.

Precautions

Health & Safety

Renderoc Plug contains cement powders which, when mixed or become damp, release alkalis which can be harmful to the skin. During use, avoid inhalation of dust and contact with skin and eyes. Wear suitable protective clothing, gloves, eye protection and respiratory protective equipment. The use of barrier creams provide additional skin protection. In case of contact with skin, rinse with plenty of clean water, then cleanse with soap and water. In case of contact with eyes, rinse immediately with plenty of clean water and seek medical advice. If swallowed, seek medical attention immediately - do not induce vomiting.

Fire

Renderoc Plug is non-flammable.

® Denotes the trademark of Fosroc International Limited

Important note :

Fosroc products are guaranteed against defective materials and manufacture and are sold subject to its standard terms and conditions of sale, copies of which may be obtained on request. Whilst Fosroc endeavours to ensure that any advice, recommendation specification or information it may give is accurate and correct, it cannot, because it has no direct or continuous control over where or how its products are applied, accept any liability either directly or indirectly arising from the use of its products whether or not in accordance with any advice, specification, recommendation or information given by it.

telephone	fax	e-mail
+91 80-22240018/120	+91 80-22233474	india@fosroc.com



Fosroc Chemicals (India) Pvt. Ltd.

Head Office

111/3, Hafeeza Chamber II Floor,
K H Road, PBN0. 2744, Bangalore 560027
www.fosroc.com

Bangalore

Shankar House, IV Floor
1 & 18, RMV Extension
Bangalore 560 080
Ph:080-2361 3161/2361 2004
Fax : 080-2361 7454
email: Bangalore@fosroc.com

Mumbai

208/209, Persepolis
Sector 17, Vashi
Navi Mumbai 400 703
Ph:022-2789 6412/14
Fax: 022 - 2789 6413
email:Mumbai@fosroc.com

Delhi

First floor,1/2 East Patel Nagar
Opp: Vivek Cinema, Main Patel Rd
New Delhi 110 008
Ph:011-25884903/4
Fax: 011- 25884422
email:Delhi@fosroc.com

Kolkata

130/B Jodhpur Park
Ground Floor
Kolkata 700 068
Ph: 033 2472 5482
Fax: 033-2472 9921
email:Kolkata@fosroc.com

Regional Offices

●Ahmedabad : (079) 26762799 ●Ankleshwar :(02646) 220704/224687 ●Bhubaneshwar : (0674) 2546415 ● Chennai (044) 24899949/24853383
●Chandigarh : (0172) 2639360 ● Cochin : (0484) 2356668 ●Coimbatore : (0422) 2472966 ●Goa : (0832) 2542465 ●Guwahati (0361) 2548793
●Hyderabad : (040) 27662324/27662425 ● Hubli (0836) 3402597 ●Indore : (0731) 504339/5061477 ● Jaipur : (0141) 2235349 ● Jamshedpur:
(0657) 2223848 ● Lucknow :(0522) 2239044 ● Nagercoil (04652) 2224849 ● Mangalore: (0824) 22272234 ● Visakhapatnam : (0891) 2564850

